


APD 1650 M

Mitsubishi

D+ &



ISO8528

GC,) &

SZUTEST

GC - \$\$\$



2000/14/EC

& \$\$\$ # (#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	1650,00	1320,00	1500,00	1200,00	2168,00

fP GDE

GC,) &

,) & z

fDF DE

%\$!

% % %&

GC " \$ (**

z&(

GC

Standard Specifications

z

fl

E

z

TRANSFER SWITCH

APD 1650 M

Mitsubishi

D+' &'

Manufacturer		Mitsubishi
Model		S12R-PTAA2
		% \$\$' "# "
		% (%\$\$' "
		0% ' &\$\$< DQ
	L	49,000
	"	170 X 180
		13.5:1
	fl # 7	"# " 1500
	fl 7	L 180,00
		L 317,00
AbsorbedAirDischargeReSourceKey.Text	' # "	120,00
	' # "	1800,00
	° C	318,00
		24 V d.c.
	Load	%\$\$i
	# "	
		317,00

		ECO46-1S/4
	Hz	50
	"	1500,00
7cg'		0,80
		3
	fl 7	400/230

		fl 7		fl 7	
	"	"	"	"	L
APD 1650 M	13000,00	5000,00	2200,00	3100,00	2000,00
		fl 7		fl 7	
	"	"	"	"	L
AK 99	18000	9000	2800	3300/4800	2200

D+' &'



APD 1650 M

Mitsubishi

D+' &'

1

'8G9ž '+' &\$ž
) 5ž&&\$#&(\$

1

1

1

'8G9+' &\$
&&\$ ž

fl

"'8G9+' &\$

'8G9+' &\$

ž

% &I '* (

žFG&' &žFG(,) ž

ž

APD 1650 M

Mitsubishi

D+' &'



f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#



f&)+L

f&)(, L

f&)% \$L

6G'9B'*\$-\$) \$

6G'9B'*\$\$\$!*!&

6G'9B'*\$\$\$!*!(

#



ž

%, !&*(

&(\$)

ž

ž

GA 8

!&+""


ž

APD 1650 M

Mitsubishi

D+ &''

5? -- !'

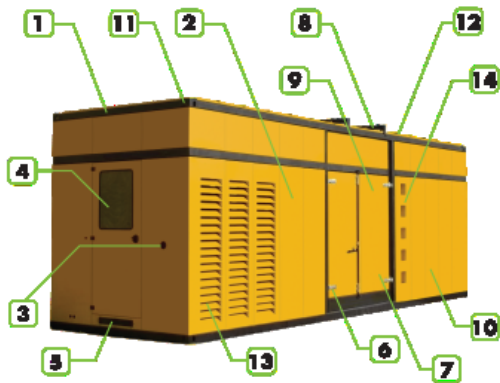

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the back of the generator set
- 5 generator set
- 6 Cables out locations are back of the canopy.
- 7 Corrosion-resistant locks and hinges.
- 8 oil could be drained via valve and a hose
- 9 Exhaust system on the canopy.
- 10 special large access doors for easy maintenance
- 11 the cap on the canopy provides easy access to radiator cap.
- 12 Lifting points similar to ISO container , located on each top corner of the canopy.
- 13 the canopy.
- 14 sound proofing materials

	"	2800
fl "L	"	9000
fl "L	"	3300/4800
	L	2200